


The "Utility" Stripping Machine

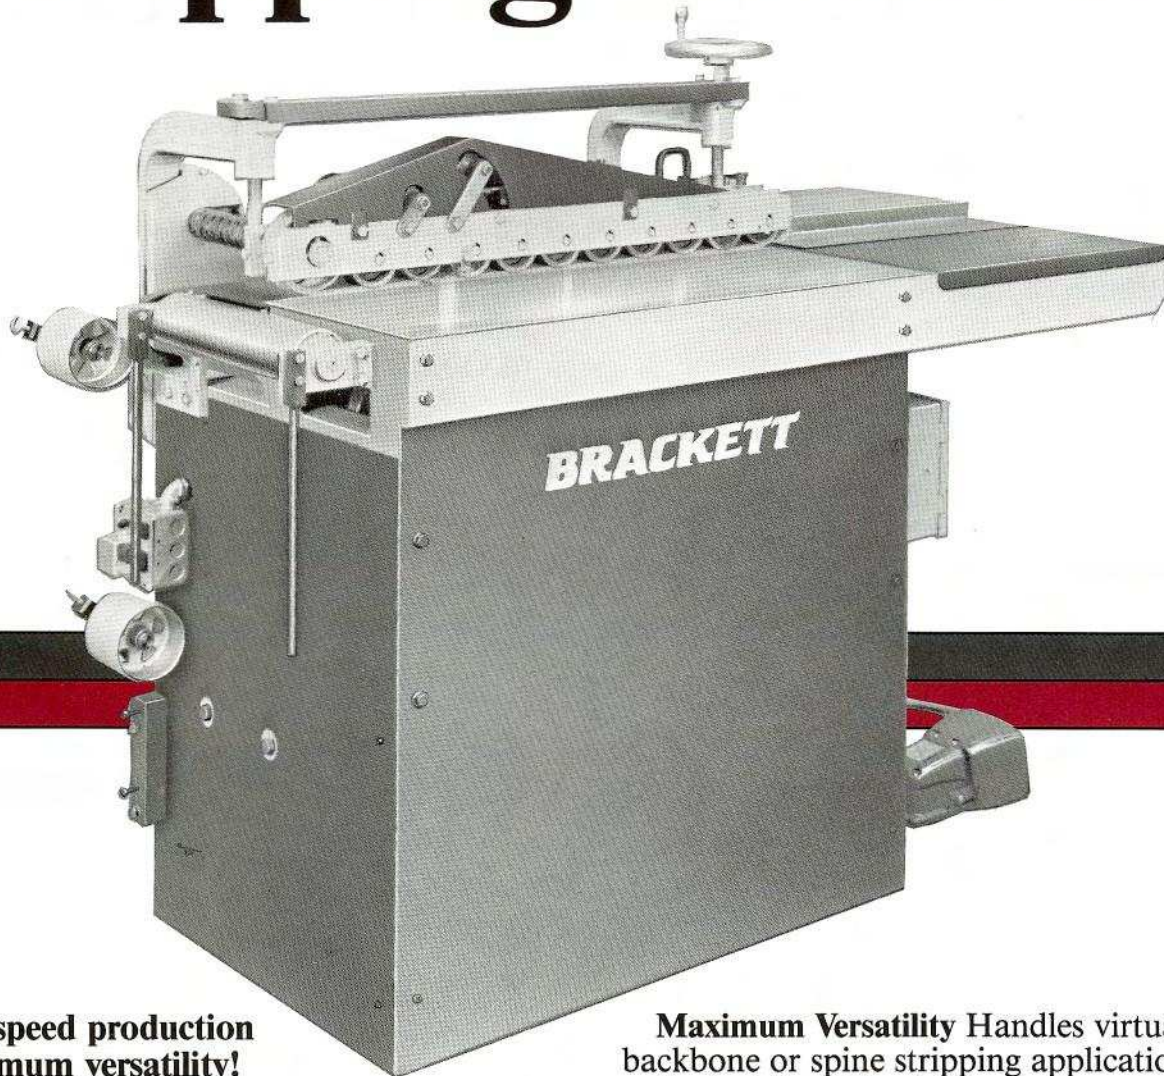

For high-speed production and maximum versatility!

Count on this stripping machine to meet your production needs and speeds — it's a result of our 70 years' experience, building dependable machines for demanding applications.

Special features include...

High Volume Up to 2,500 books per 50-minute hour, on typical jobs.

Superior Quality The longer stripping head produces a tighter, smoother turnover with a quality appearance.

Maximum Versatility Handles virtually any backbone or spine stripping application as well as limited flat stripping.

Easy Operation No special skills or training needed. With automatic stack feeding, one operator is often enough. Two operators maximum, under any conditions.


Quick Changeover Change jobs in 3 to 5 minutes. Runs of 75 to 100 pieces can be profitable!

Low Upkeep Heavy-duty corrosion-resistant construction with bronze and oilless bearings provide long, trouble-free service.


P.O. Box 19306 • Topeka, KS 66619-0306 USA
800-255-3506 • (785) 862-2205 • Fax (785) 862-1127
<http://www.brackett-inc.com>
E-Mail: brackett@brackett-inc.com

BRACKETT


Stripper Applications

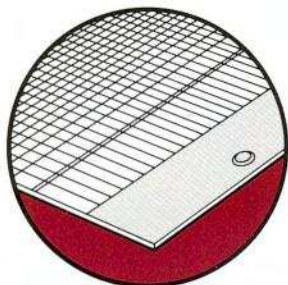


Sheet Reinforced at Edge

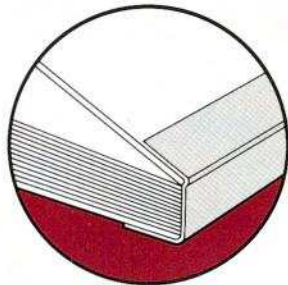

Plain Square-Back Book

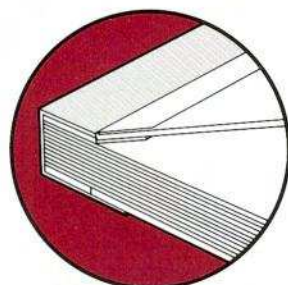

Hinge-Cover Book

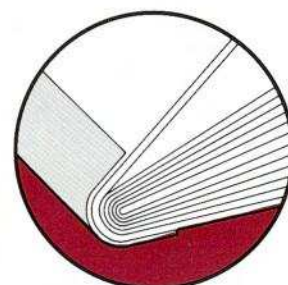

Round-Back Book

Stripper Specifications

Capacity Any thickness from a single sheet to 1¼-inch book, with a limit of tape turn-over of 1¼ inches on each side. Will apply a flat strip along the edge of any size sheet.

Feeding Manually fed to a right-hand guide. Instant start and stop via foot control.

Variable Speed 28 to 77 feet/minute, book travel through the stripping heads. For limited applications, faster speeds are attainable.

Power ½ HP 110V/1P/60Hz. Special voltages on request.

Knife Maximum cutting reach of blade proper, 1¼ inches. Minimum length required for knife to reset for subsequent cuts, 5½ inches.


Size Machine: 3 feet 3 inches wide, 5 feet long plus 3 feet for delivery box. Floor space needed: 5 feet by 10 feet.

Weight Net: 560 lbs. Crated: 700 lbs. Export crating: 950 lbs., 40 x 60 x 74 inches.

Machine Shipped set-up after factory testing, the machine is ready to operate with only a few minor adjustments fully covered in the operator's manual. Pressure sensitive tape attachment is available at extra cost. Machine is guarded according to Brackett's interpretation of O.S.H.A. specifications.

Stripper/Padder Combination

Our "Utility" Stripper may be combined with our Circular Padder to make a unique small stripping and padding system.

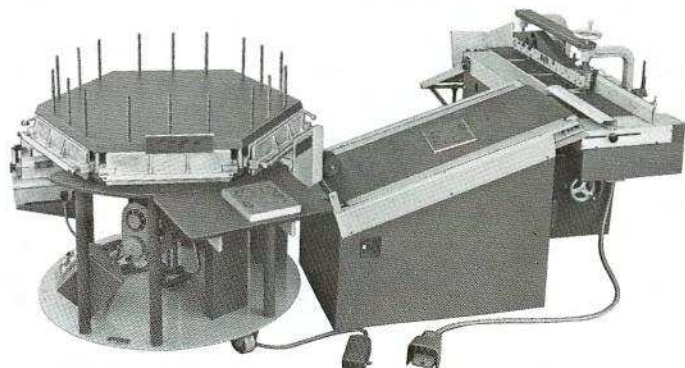

Specialized Equipment for Graphic Production

Brackett also manufactures flat stripping machines, automatic padding machines, in-line vertical padding/stitching machines, belt and roller conveyors, joggers and other specialty equipment for bindery and converting operations.

P.O. Box 19306 • Topeka, KS 66619-0306 USA
800-255-3506 • 785 862-2205 • Fax 785 862-1127
<http://www.brackett-inc.com>
E-Mail: brackett@brackett-inc.com

BRACKETT