


BRACKETT


Utility Stripping / Taping Machines

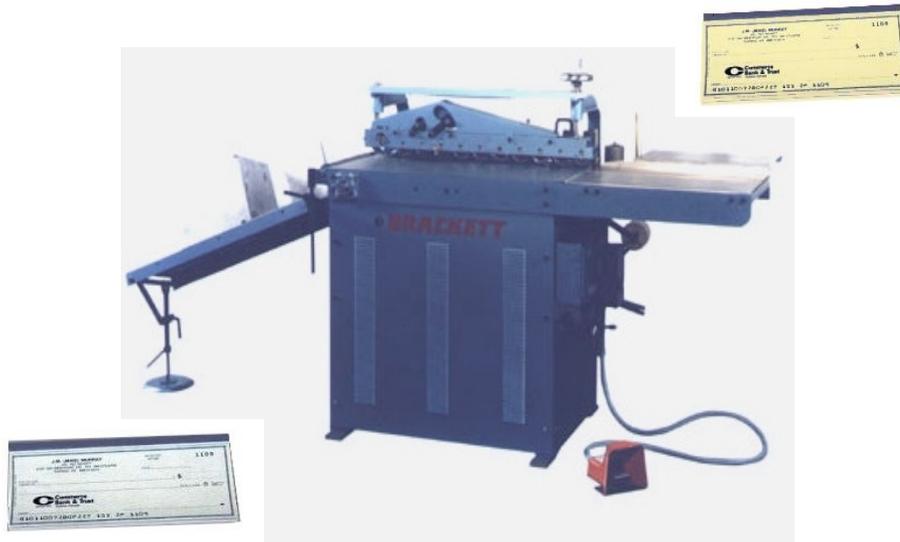

The Brackett Utility Stripper is a high-volume production machine for your tape application needs. Nearly a century of "proofing" has shown the Utility to be a durable, dependable, invaluable piece of equipment in shops world-wide.

With easy operation, fast set-up, and 3-5 minute change-over; runs as small as 75 to 100 pieces can be profitable ! Available options include special voltages, pressure sensitive taping, a long work-collection box and more.

See our full brochure for further details and call us for a quote, or with any questions you may have. Discover how the Brackett Utility Stripper can increase your workflow AND your profits.

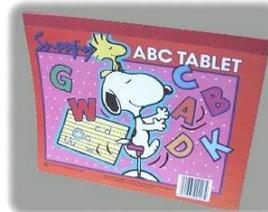

Brackett Inc.

P.O. Box 19306

Topeka, KS 66619

(800)-255-3506 (785)-862-2205

FAX (785)-862-1127

E-Mail: sales@brackett-inc.com

Internet: www.brackett-inc.com

BRACKETT

INFEED OPTIONS

Manual: Operator places product against guide and pushes into belted compression heads.

Optional Hopper spacer with Stackfeed: Product is placed into stack area, hopper feed fingers (set just below work thickness) automatically space and feed product into belted compression heads.

Optional Auto spacing Infeed

For “Circular Padder Line” : Product is spine-glued at the Circular Padder and delivered into auto spacing infeed for tape application to product. Photo sensor on Utility starts/stops the machine to keep the gap consistent.

FRAME

The base frame and all components are manufactured from steel angle and plates, bolted and welded for a strong, precision fit.

BELTED COMPRESSION HEADS

Adjustable up and down. Handles work product (ie... books, sections, boards, square or round back) up to 1-1/4 inches thick.

GLUE POT

Double cooker pot will use hot animal glue, cold glue or water (for pregummed tape). The glue roller/s are adjustable for edge type gluing or wide roller for full tape width application. Standard pot location is under the machine for flat stripping the bottom of the product.

TAPE APPLICATION

The tape reel is located on the glue pot. Tape is routed through several guides then over the glue rollers around several tape guide/tensioners onto a piece of dummy work, which is then fed into the belted compression heads to start the taping application. A pressure sensitive tape applicator is available as an option.

CUT OFF KNIFE

Mechanically tripped rotary head knife, adjustable to cut as required for product length and machine speed.

DELIVERY

Consists of a machine driven single roller to take the product away from the knife into a work collection box.

Brackett Inc.

P.O. Box 19306

Topeka, KS 66619

(800)-255-3506 (785)-862-2205

FAX (785)-862-1127

E-Mail: sales@brackett-inc.com

Internet: www.brackett-inc.com

BRACKETT

Utility Stripping / Taping Machines

PRODUCT SPECIFICATION SHEET

Manual infeed machine:

Work Width -- Side to Side of page

Minimum: 3.00 inches (76.2 mm)

Maximum: 15.00 inches (381.0 mm)

Work Length -- Top to bottom of page

Minimum: 5.50 inches (139.7 mm)

Maximum: 23.00 inches (584.2 mm)

Work Thickness

Minimum: .03125 inches (.793 mm)

Maximum: 1.25 inches (31.75 mm)

Hopper Spacer infeed machine:

Work Width -- Side to Side of page

Minimum: 3.00 inches (76.2 mm)

Maximum: 14.00 inches (355.6 mm)

Work Length -- Top to bottom of page

Minimum: 7.00 inches (177.8 mm)

Maximum: 17.00 inches (431.8 mm)

Work Thickness

Minimum: .125 inches (3.18 mm)

Maximum: 1.25 inches (31.75 mm)

Tape Specifications --

Roll core diameter minimum: .500 inches (12.7 mm)

Maximum roll diameter: 19.00 inches (482.6 mm)

Maximum roll width: 3.75 inches (95.25 mm)

Tape wrap side maximum: 1.25 inches (31.75 mm)

Stripping tape glue pot --

Hot animal, cold glue, water.

Optional hot melt stripping pot mounted on universal stand.

Machine speed --

Minimum: 20 feet per minute (6.096 meters)

Maximum: 81 feet per minute (24.69 meters)

Electrical requirements --

Standard: 120 Volt, Single phase, 60 Hertz, 20 Amps

Options: Other electrical available as option at time of manufacture

Weight -- *Basic machine:* 560 lbs. (254 kg)

Shipping crate -- (Approximate)

Basic machine: Inches = 76 L x W x 55 H

Centimeters = 193 L x 94 W x 140 H

Brackett Inc.

P.O. Box 19306

Topeka, KS 66619

(800)-255-3506 (785)-862-2205

FAX (785)-862-1127

E-Mail: sales@brackett-inc.com

Internet: www.brackett-inc.com